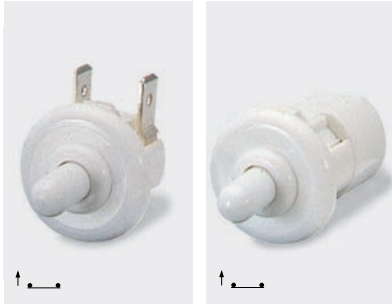
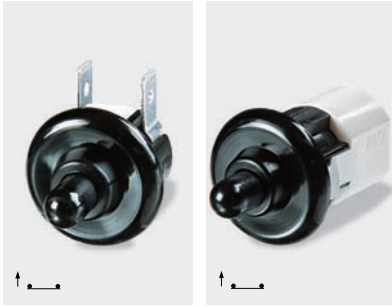


0055 Door Switches



C0055RB ---

C0056RB ---




C0055RB ---

C0056RB ---

- ▶ Ratings up to 2A, 250V ac
- ▶ High temperature rating up to 125°C
- ▶ Long overtravel
- ▶ Choice of terminal orientation


Approvals and specifications










0055 & 0056
0.2(0.2)A 250Vac 25T125 5E4
(50,000 operations)


µ contact gap

Technical data on pages 4 & 5



▶ TERMINAL	▶ FUNCTION	▶ ACTUATOR	▶ BODY	▶ OPTIONS				
<p>C</p>  <p>6.3 x 0.8</p> <p>9.1</p>	<p>0055</p>  <p>ON - OFF (momentary OFF) 90° terminals</p>	<p>R</p> 	<p>B</p> <p>Panel cut-out</p>  <p>Panel thickness</p> <table border="1"> <tr> <td>0055</td> <td>1.0 - 1.6</td> </tr> <tr> <td>0056</td> <td>1.0 - 2.6</td> </tr> </table>	0055	1.0 - 1.6	0056	1.0 - 2.6	<p>Finish</p> <p>Gloss finish only</p> <p>Colour</p> <p>White or black</p> <p>Call sales for custom colours.</p>
0055	1.0 - 1.6							
0056	1.0 - 2.6							
<p>H (0056 only)</p>  <p>4.8 x 0.8</p> <p>9.1</p>	<p>0056</p>  <p>ON - OFF (momentary OFF) Straight terminals</p>	<p>Flange</p> 						

Dimensions (mm)
C0055RB



C0056RB

