


- 85% Efficiency
- Internal Short-Circuit Protection
- Pin-Compatible with 3-Terminal Linear Regulators
- Laser-Trimmed Output Voltage
- Over-Temperature Protection
- Small Footprint
- Wide Input Range

use, 1 Amp positive step-down, 3-terminal Integrated Switching Regulators (ISRs) designed for pin compatibility with linear regulators. These ISRs can be used in a wide variety of on-board power regulation applications including computer, data storage, industrial controls, medical, and battery powered equipment. The series of ISRs has excellent line and load regulation and laser-trimmed output voltage.


The PT5100 Series is Power Trends' line of economical, easy-to-

### Standard Application



### Pin-Out Information

Pin	Function
1	V <sub>in</sub>
2	GND
3	V <sub>out</sub>



### Ordering Information

PT5101	= + 5 Volts
PT5102	= + 12 Volts
PT5103	= + 3.3 Volts
PT5105	= + 6.5 Volts
PT5107	= + 15 Volts
PT5109	= + 5.6 Volts
PT5110	= + 9 Volts
PT5111	= + 10 Volts
PT5112	= + 8 Volts

### PT Series Suffix (PT1234X)

Case/Pin Configuration	Suffix
Vertical Through-Hole	<b>N</b>
Horizontal Through-Hole	<b>A</b>
Horizontal Surface Mount	<b>C</b>

### Specifications

Characteristics (T <sub>a</sub> = 25°C unless noted)	Symbols	Conditions	PT5100 SERIES			Units
			Min	Typ	Max	
Output Current	I <sub>o</sub>	Over V <sub>in</sub> range	0.1*	—	1.0	A
Short Circuit Current	I <sub>sc</sub>	V <sub>in</sub> = V <sub>in min</sub>	—	3.5	—	A <sub>pk</sub>
Input Voltage Range	V <sub>in</sub>	0.1 ≤ I <sub>o</sub> ≤ 1.0 A V <sub>o</sub> = 3.3V V <sub>o</sub> = 5V V <sub>o</sub> = 12V V <sub>o</sub> = 15V	9 9 16 19	—	26 38 38 38	V V V V
Output Voltage Tolerance	ΔV <sub>o</sub>	Over V <sub>in</sub> Range, I <sub>o</sub> = 1.0 A T <sub>a</sub> = 0°C to +60°C	—	±1.5	±3.0	% V <sub>o</sub>
Line Regulation	Reg <sub>line</sub>	Over V <sub>in</sub> range	—	±0.5	±1.0	% V <sub>o</sub>
Load Regulation	Reg <sub>load</sub>	0.1 ≤ I <sub>o</sub> ≤ 1.0 A	—	±0.5	±1.0	% V <sub>o</sub>
V <sub>o</sub> Ripple/Noise	V <sub>n</sub>	V <sub>in</sub> = V <sub>in min</sub> , I <sub>o</sub> = 1.0 A	—	±2	—	% V <sub>o</sub>
Transient Response with C <sub>o</sub> = 100µF	t <sub>tr</sub> V <sub>os</sub>	25% load change V <sub>o</sub> over/undershoot	— —	100 5.0	200 —	µSec % V <sub>o</sub>
Efficiency	η	V <sub>in</sub> = 9V, I <sub>o</sub> = 0.5A, V <sub>o</sub> = 3.3V V <sub>in</sub> = 9V, I <sub>o</sub> = 0.5A, V <sub>o</sub> = 5V V <sub>in</sub> = 16V, I <sub>o</sub> = 0.5A, V <sub>o</sub> = 12V V <sub>in</sub> = 19V, I <sub>o</sub> = 0.5A, V <sub>o</sub> = 15V	— — — —	82 85 90 92	— — — —	% % % %
Switching Frequency	f <sub>o</sub>	Over V <sub>in</sub> and I <sub>o</sub> ranges, V <sub>o</sub> = 3.3V V <sub>o</sub> = >5V	575 500	725 650	875 800	kHz
Absolute Maximum Operating Temperature Range	T <sub>a</sub>		-20	—	+85	°C
Recommended Operating Temperature Range	T <sub>a</sub>	Free Air Convection, V <sub>o</sub> = 3.3V (40-60LFM) V <sub>o</sub> = 5V At V <sub>in</sub> = 24V, I <sub>o</sub> = 0.75A V <sub>o</sub> = 12V	-20 -20 -20	— — —	+80** +80** +80**	°C
Thermal Resistance	θ <sub>ja</sub>	Free Air Convection V <sub>o</sub> = 3.3V (40-60LFM) V <sub>o</sub> = 5V V <sub>o</sub> = 12V/15V	— — —	45 50 60	— — —	°C/W
Storage Temperature	T <sub>s</sub>		-40	—	+125	°C
Mechanical Shock		Per Mil-STD-883D, Method 2002.3 1 msec, Half Sine, mounted to a fixture	—	500	—	G's
Mechanical Vibration		Per Mil-STD-883D, Method 2007.2 20-2000 Hz, Soldered in a PC board	—	5	—	G's
Weight			—	4.5	—	grams

\* ISR will operate down to no load with reduced specifications.


\*\*See Thermal Derating chart.

**Note:** The PT5100 Series requires a 100µF electrolytic or tantalum output capacitor for proper operation in all applications.


**1 Amp Positive Step-down  
Integrated Switching Regulator**

**PT5103, 3.3 VDC** (See Note 1)


**Efficiency vs Output Current**




**Ripple vs Output Current**

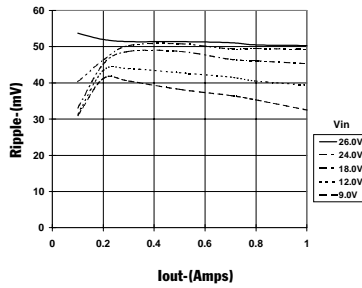

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

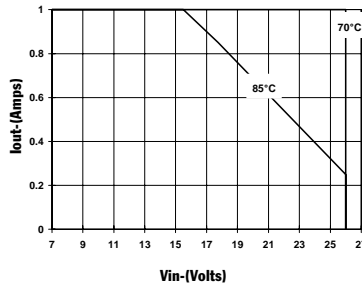


**Power Dissipation vs Output Current**

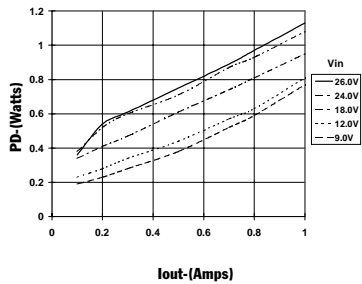


**PT5101, 5.0 VDC** (See Note 1)


**Efficiency vs Output Current**

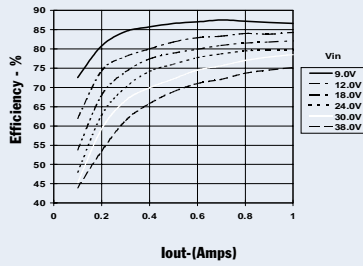


**Ripple vs Output Current**

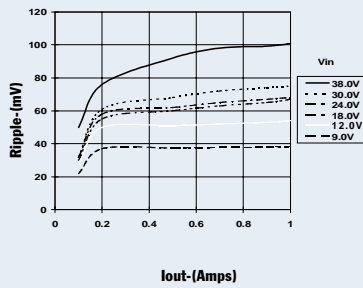

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

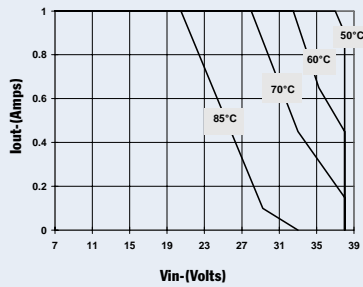


**Power Dissipation vs Output Current**

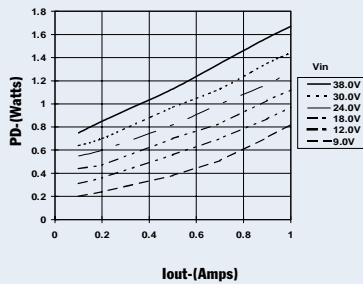


**PT5102, 12.0 VDC** (See Note 1)


**Efficiency vs Output Current**

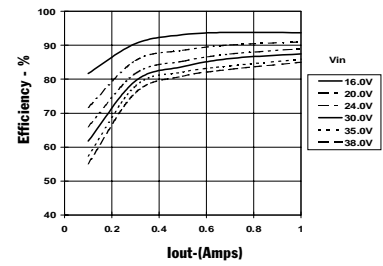


**Ripple vs Output Current**

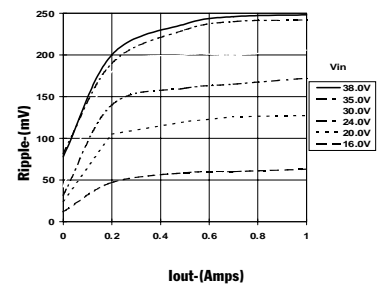

**Thermal Derating (T<sub>a</sub>)** (See Note 2)

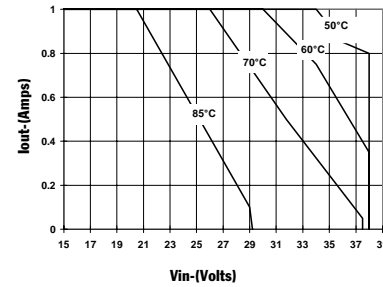

**Power Dissipation vs Output Current**

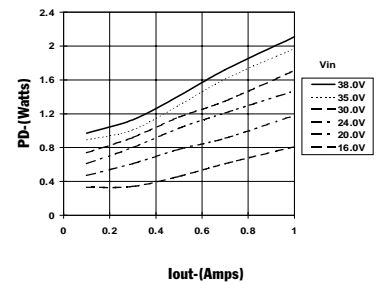

**Note 1:** All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the ISR.  
**Note 2:** Thermal derating graphs are developed in free air convection cooling of 40-60 LFM. (See Thermal Application Notes.)

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgment, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

Customers are responsible for their applications using TI components.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.